


# FURNITURE SPECIFICATIONS

Last Revised: 22-11-2011

## CLERICAL Workstation Code: WS-01-600-600-L/R

Typical Clerical Work Station

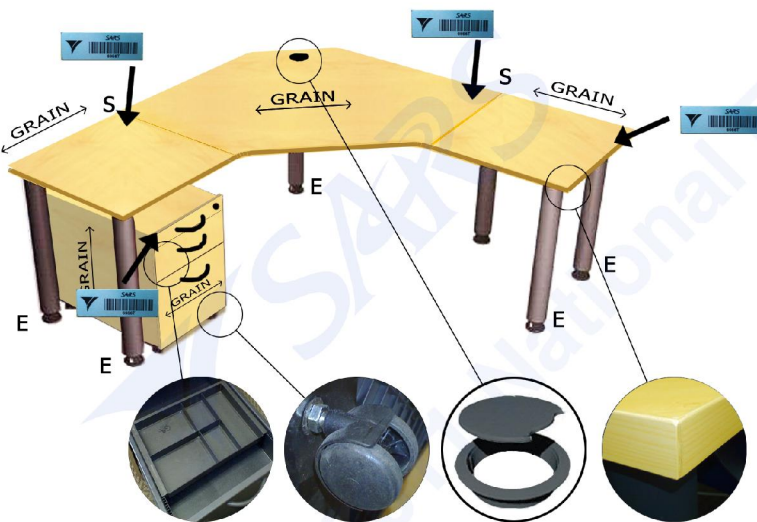









### FINISH




**CLASS E1 Board**



Vancouver Maple 688 CDL (Decon) Lo-glare, Glaze - Woodtext

PIC	NO#	DESCRIPTION
	1x	E1 STD CORE 1200 x 1200 x 650
	2x	E1 TOP 600w x 650d
	5x	ECO LEG (E) Finish: SaddleWood Matt
	2x	STANDARD LEG (S) Finish: SaddleWood Matt
	4x	VARIABLE CONNECTOR
	1x	MOBILE PEDESTAL FC-23
	1.5x	SNAIK -1000mm long
	2x	OPTIONAL STEEL MODESTY PANEL. Finish: SaddleWood Matt

### CAD Furniture Symbol:



NOTE: CAD dwg files are available from Facilities for CNC machines.

### CODE Description

<b>WS</b>	<b>01</b>	<b>600</b>	<b>600</b>	<b>L/R</b>
CATEGORY	CATALOG NO	TOP	TOP	PEDESTAL LOCATION

### Barcode:

SARS issued barcode to be fixed top right hand side of each component and left hand side of pedestal before delivery to site.

### TECHNICAL INFORMATION

- Dimensions:** 1800mm x 1800mm x 752mm high.
- Worktop:** 32mm thick worktop substrate from Class E1 high-density particle board with surface of 0.5mm Decon CDL with overlay. All tops to be pre-drilled and fitted with metal grommets to accommodate a M6x16 allen screw (5mm Allen Key). All parts not exposed / visible to get 0.2mm brown balanced backer.
- Reticulation:** CDS Plastics 'CMS03' 80mm Charcoal cable outlet positioned as per drawing. 1500mm long CDS Plastics "SNAIK" tray to underside of desk top as per drawing position.
- Finishes:** Top to be in Class E1 Vancouver Maple CDL with 2mm maple finish flat edge high impact edging.
- Table Legs:** ECO and Standard Legs to be finished in SaddleWood Matt powder coated application. Non centre thread bolt type - sleeve thread only.
- Pedestal:** Pedestal as per catalog. Class E1 FC-23 included as standard part of this workstation.
- Supplier:** Plasticised sticker fixed out of sight, stating: Supplier, physical address and contact details.
- Warranty & Design:** All units to carry a minimum 5 year warranty under normal office environment conditions. The specifications as contained in this document are the minimum SARS requirements. Vendor to take design responsibility & ensure correct specifications.