


SEATING SPECS

Last Revised: 22-06-2012

Security Chair Code: CHAIR-08-SEC

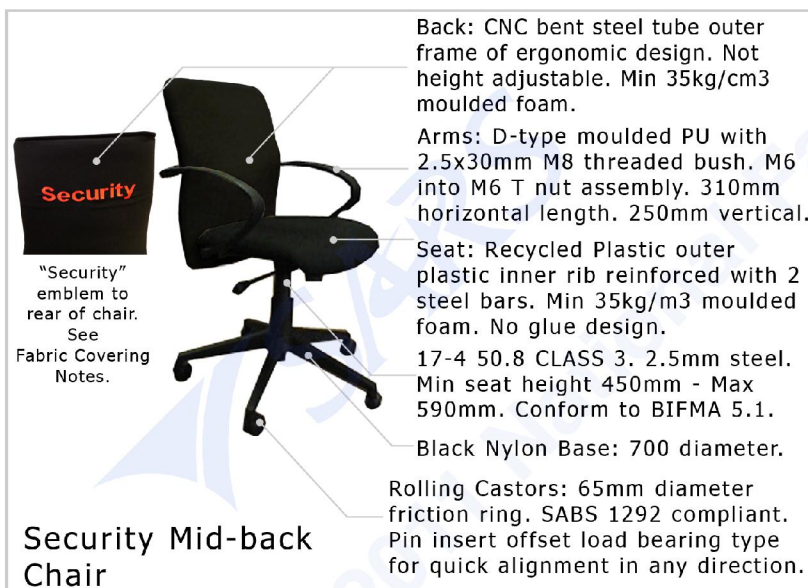

FABRIC COVERING

Fabric:

Hardware (Seat and Backrest)

Supplier: Weavers World

Note: Sold in rolls of 50 lm only.

Stitching:

Font size is 15

Red Cotton

Font name:

SARS Security Embroidery
made by WeaversWorld

NOTE:

CHAIR-08 is strictly for security staff locations as specified by Facilities Standards and Norms

Under no circumstances may this chair be ordered without Facilities prior approval.

Roma Syncro Mech:

MODIFIED (*Backrest Lever removed)

- *Two Lever Full Synchron.
- *5 position lock.
- *Backrest 82-106 motion.
- *Seat 2-12 degree motion.



CODE Description

CHAIR	08	SEC
CATEGORY	CATALOG NO	TYPE

Barcode:

SARS issued barcode to be fixed under seat base mechanism before delivery to site.

Castor Size:


- Wheel to measure 65mm.



Fabric label:

Fabric label stitched to chair indicating:

- *Manufacturer
- *Address
- *Contact no.
- *e-mail address



TECHNICAL DATA

Backrest:	CNC bent steel tube outer frame shell with lugs for armrests and connections. Non-Height adjustable back rest. Integrated safety lock feature. Min 35kg/cm ³ pan moulded ergonomically shaped expanded foam. 500w x 650h measured from seat. No gluing of fabric to foam. Fabric as specified.
Seat:	Plastic outer and plastic inner rib reinforced seat shell with 2 steel bars for additional support. Min 35kg/m ³ moulded foam seat. No glue design. Size approx 480 x 480. Fabric as specified.
Arms:	Armrest to be manufactured from molded nylon or polyurethane shaped to ensure chair fits under desk. Arm to be constructed so as to be a full loop and not be open at the end. 2.5x30mm M8 threaded bush. M6 into M6 T nut assembly.
Mechanisms:	Gas Cylinder and standpipe assembly to conform to German safety standards and able to carry a body mass of up to 130kg. 17-4 50.8 CLASS 3 2.5mm. Min height 450mm. Max height 540mm. 140mm adjustment range. BIFMA 5.1 compliant. 3 Section Telescopic nylon cover in colourfast black matt finish. Roma Two lever full synchron centre pivot mechanism as per indicated image with back rest lever removed to prevent adjustment once set.
Spider Base: & Castors	Five star reinforced (lattice construction) injection-moulded talc-free nylon in colourfast black matt finish, 700 diameter minimum. Free swivelling Castor Wheels lattice-reinforced (minimum of 8 fins) nylon type or polyurethane (for tiles areas) in colourfast black matt finish. Castor size: Min 65mm diameter of physical wheel.
Supplier: Warranty & Design:	Embroidered fabric label fixed to side of backrest stating: Supplier, physical address and contact details. Unit to be supplied with MINIMUM 5 year Warranty under normal office usage conditions. The specifications as contained in this document are the minimum SARS requirements. Vendor to take design responsibility & ensure correct specifications