


FINISHES LAYOUT  
1:200

SANITARY SCHEDULE					SPECIFICATION
MALE	FEMALE	SHOWERS	ACCESSIBLE	QUANTITY	
•	•			4	S1- Urban Life Wall Hung Pan - Product Code 43900WH, Vaal Sanitaryware vitreous china "Urban Life" 90 degrees outlet back inlet closed rim wall hung pan with quality soft close seat, to be used with concealed closed, vaal sanitary ware duct cistern code(710935) or a concealed flush valve, DPI flushfit pan collar or equipment.
			•	3	S2- Vaal, Protea Paralegic low level suite, code (7502465), colour (white), 9 litre cistern (code : 710631) complete with lid, ftments, and purpose-made C.P. side flush lever (left/right) or a back inlet exposed flushvalve. Bottom inlet water supply must be on the same side as flush lever.
			•	1	S3- Vaal, Hibiscus Basin, code (7023) comprising cobra medical elbow action range taps of pillar type with codes(503-218 and 503-21R) for cold and hot water respectively.
			•	3	S4- Dog Leg Side Rail, code DL2, Stainless Steel.
					Vaal Sanitaryware vitreous china 510 x 440mm rounded "Amber" basin with three semi-punched tapholes, (i.e. available in zero, one, two or three taphole configurations), integrated overflow and chain stay hole through the centre semi-punched taphole. Available in white only, Mass Volume Basin 11.25 kg 0.044 m³ Amber Pedestal 9.25 kg 0.013 m³ Universal half pedestal 4.00 kg 0.012 m³
•	•			1	SH-Cobra 2 x unfertile stop taps with shower arm, shower head, diverter and thread
		•		2	bath spout. Code (461STELLA)

SARS MUSINA SANITARY Schedule  
1:1.43

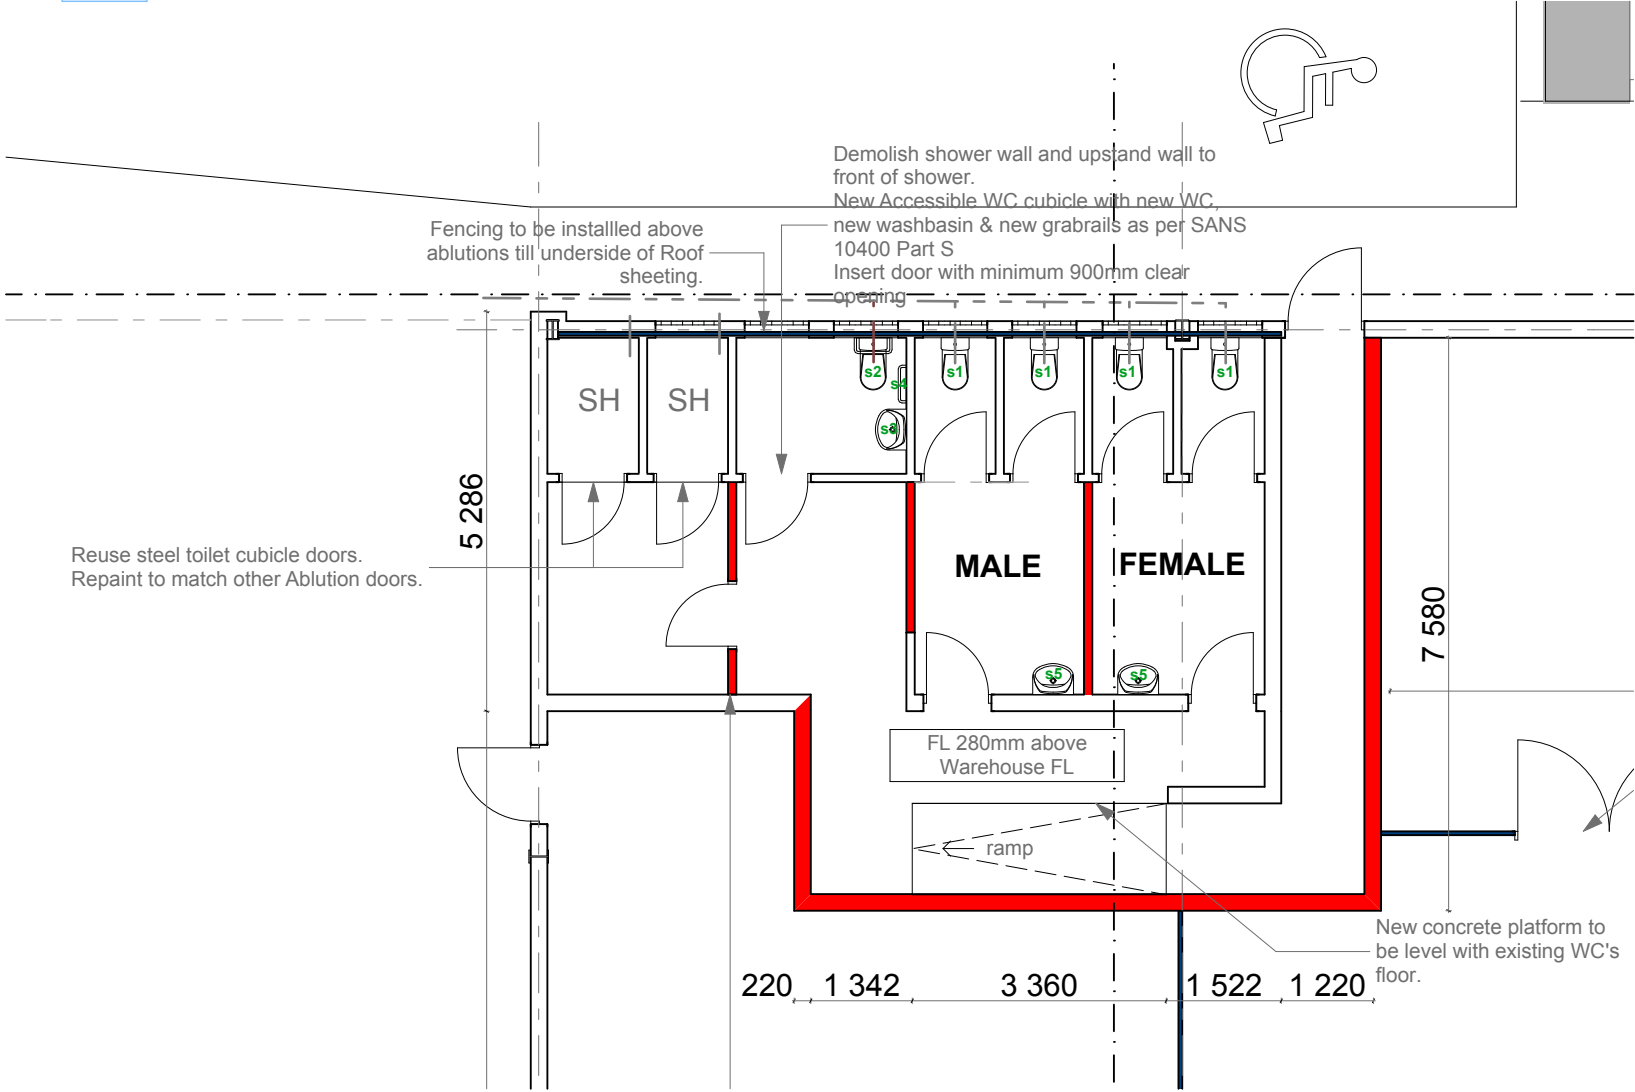

SANITARY LAYOUT  
1:100

FINISHES SCHEDULE								SPECIFICATION
ABLUTIONS	STORE R.	STRONG R.	H/V STORAGE	SECURITY	HAZ. MAT.	DESTRUCTION	ALL EXTERIOR PLASTERED WALLS	Offices
								• WP 03 - Gids Glove, Dulux Wash and Ware , Manufacturing code(61-1-2). This is to be applied to all internal walls.
								• WP 04 - Birch Bark Canoe, Dulux Wash and Ware , Manufacturing code(61-1-4). This is to be applied to all interior areas of the perimeter walls of the warehouse.
								• WP 05 - khaki mistis 5, Dulux Acrylic PVA , matt finish, manufacturing code: (Application and Surface preparation to manufacturer specification)
•	•	•	•	•	•	•		• WP 06 - Grey Steel 3, Dulux Acrylic PVA tinted, matt finish. (Application and Surface preparation to manufacturer specification)
•								• F09 - Union Menilla, 330 X 330mm 1JHUN Manufactured by Union Tiles and supplied by Johnson Tiles.

SARS MUSINA Finishes Schedule Rev02  
1:1.29

REVISIONS

Date	Description	Drawn by

DESIGNED  
HO NGOLA PLANE  
ONTWERP

DRAWN  
NGODILWE  
GETEKEN

CHECKED BY:  
HLALELOBIWE KE:  
NAGEGAAN DEUR:

SCALE:  
SEKALA:  
HO DUMELANA:  
GOEDGEKEUR:

FILE NR:  
PEHO YA NOMORO:  
LEEN NO:

DRWG NR:  
NGODISO YA NOMORO:  
TEK NO:

DATE  
LETSATSI  
DATUM

NAME  
LEBITSO  
NAAM

DATE  
LETSATSI  
DATUM

1:200, 1:100, 1:1.43, 1:1.29 @ A1

AMS\_LP\_055\_SM\_W

AMIS\_LP\_055\_SM\_W\_TD\_F-S

REVISION NR:  
PHETOHO:  
HERSENING NO:

TENDER DOCUMENTATION  
ADDITIONS AND ALTERATIONS TO  
WAREHOUSE FOR SARS MUSINA.

NOT FOR CONSTRUCTION

SERVICE  
MOSEBETSI  
DIENS

HO NGOLA  
HO BOLEDISA

TEKENING  
BESKRYWING

FINISHES & SANITARY