


External Signage

Last Revised: 21-08-2018

Type: 15 - "SARS"

Location: Pavement/floor moveable sign used when building facade cannot accept wall mounted signage.

Description: SARS external branding signage. Used in main public buildings, eg. Receiver of Revenue buildings.

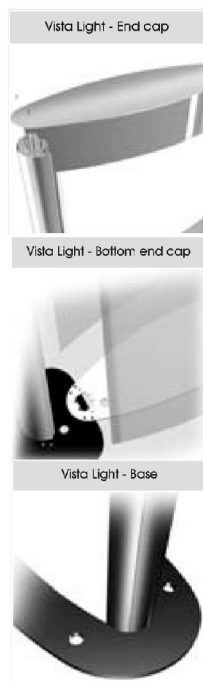

TECHNICAL DATA

Frame: Vista VL700 double sided lightbox profile with frame height to support a 2000mm(h) x 788mm(w) signage face (x2 quantity).

Alumination: None

Face: Opal PX 050 3mm perspex face panel "aluminium sprayed" 2K fine matt silver 730-0110 ultra clear coat for "Anodised" look. SARS 1 colour Vinyl graphics applied to perspex face on outside. Blue: Pantone 2955c

ERGONOMIC: N/A - Mobile sign. To be fitted with a stable but movable vista base

