


FURNITURE SPECIFICATIONS

Last Revised: 22-11-2011

SENIOR MANAGER TYPE 2 Code: WS-08-MNG-900-2-L/R

Typical Branch Manager Workstation

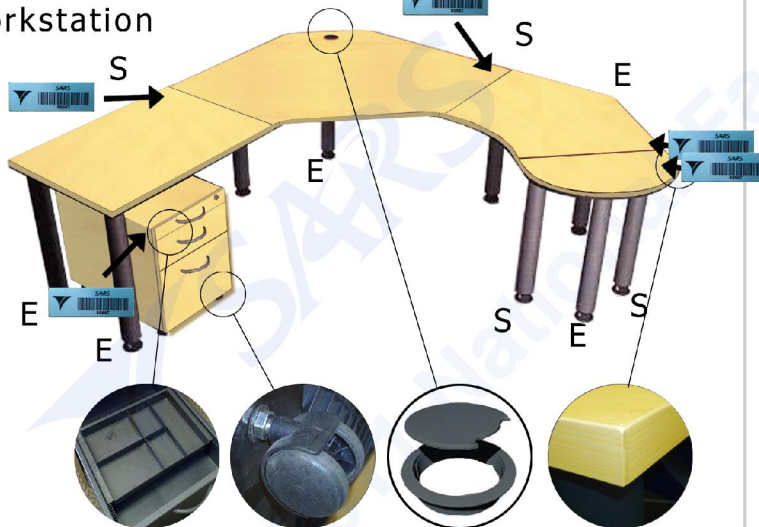











FINISH Vancouver Maple 688
CDL (Deccon) Lo-glare,
Glaze - Woodtext




CLASS
E1 Board



PIC	NO#	DESCRIPTION
	1x	E1 STD CORE 1200 x 1200 x 650
	1x	E1 D-END 300w x 650d
	1x	E1 TOP 900w x 650d
	5x	ECO LEG (E) Finish: SaddleWood Matt
	4x	STANDARD LEG (S) Finish: SaddleWood Matt
	6x	VARIABLE CONNECTOR
	1x	MOBILE PEDESTAL FC-23
	1x	E1 WING
	1.5x	SNAIK -1000mm long
	2x	STEEL MODESTY PANEL. Finish: SaddleWood Matt

CAD Furniture
Symbol:



NOTE: CAD dwg
files are available
from Facilities
for CNC machines.

CODE Description

WS	08	MNG	900	2	L/R
CATEGORY	CATALOG NO	DESCRIPTION	TOP	TYPE	PEDESTAL LOCATION

Barcode:

SARS issued barcode to be fixed all
component right side and left side of
pedestal before delivery to site.

TECHNICAL INFORMATION

Dimensions:	2240mm x 2100mm x 752mm high.
Worktops:	32mm thick worktop substrate from Class E1 high-density particle board with surface of 0.5mm Deccon CDL with overlay. All tops to be pre-drilled and fitted with metal grommets to accommodate a M6x16 allen screw (5mm Allen Key). All parts not exposed / visible to get 0.2mm brown balanced backer.
Reticulation:	CDS Plastics 'CMS03' 80mm Charcoal cable outlet positioned as per drawing. 1500mm long CDS Plastics "SNAIK" tray to underside of desk top as per drawing position.
Finishes:	Top to be in Vancouver Maple CDL with 2mm maple finish flat edge high impact edging.
Table Legs:	ECO and Standard Legs to be finished in SaddleWood Matt powder coated application. Non centre thread bolt type - sleeve thread only.
Pedestal:	Pedestal as per catalog. FC-23 included as standard part of this workstation.
Supplier:	Plasticised sticker fixed out of sight, stating: Supplier, physical address and contact details.
Warranty & Design:	All units to carry a minimum 5 year warranty under normal office environment conditions. The specifications as contained in this document are the minimum SARS requirements. Vendor to take design responsibility & ensure correct specifications.